



INSTALLATION MANUAL

Via Emilia Ovest 46/b
43126 Parma (PR) Italy
Tel +39 0521 1564103
www.xlitesrl.it
info@xlitesrl.it
Rev. No. 0
Data Rev. 17/07/2015

Article Description: E27 PHASE-CUT DIMMABLE Led Bulb 3000°K 7W 600LM size d.60x109mm

Article Code: 105058

E27 Phase-Cut Dimmable Led Bulb 3000 K 7 W 600 LM

Technical Data

Item	Symbol	Value	Unit
Power	P	7.0±10%	W
Voltage	VOLT	AC100~240V	V
Current	I	0.06A MAX	A
Frequency Range	F	50/60	Hz
Power Factor	Factor	0.5	Pf
Conversion Efficiency	η	0.87	η
Beam Angle	DEGREE	220	DEGREE
Working Temperature	TOPR	-10~50	°C
Relative Humidity	RH	10%~90%	RH
Luminous flux(white color)	LM	600	LM
Color Temperature	T	6000	K
Life-span	HOUR	30000	HOUR
LED Qty	PCS	12	PCS
LED Power	P	0.5	W



INSTALLATION MANUAL

Via Emilia Ovest 46/b

43126 Parma (PR) Italy

Tel +39 0521 1564103

www.xlitesrl.it

info@xlitesrl.it

Rev. No. 0

Data Rev. 17/07/2015

Features

1. High brightness, adopting 12pcs high quality SMD2835 LED.
2. Energy saving, high efficiency power supply, low power consumption.
3. Long lifespan:30000 hours.
4. High temperature ability, not sensitive for the humidity, can be used within the wide range of temperature.
5. Eco-friendly, no heavy metal and harmful gas.
6. No flicker, instant start, no stroboflash, protect the eyes.
7. CE and RoHs approved.

Notice

1. Please confirm the suitable voltage range, and when the voltage is too low, the brightness will be low.
2. Only can be used indoor, avoid to install on the place like the hot power supply, hot steam and the corrosion. when the bulbs are used outdoor, please make sure waterproof.






INSTALLATION MANUAL

Via Emilia Ovest 46/b
43126 Parma (PR) Italy
Tel +39 0521 1564103
www.xlitesrl.it
info@xlitesrl.it
Rev. No. 0
Data Rev. 17/07/2015

Connection for led lamps

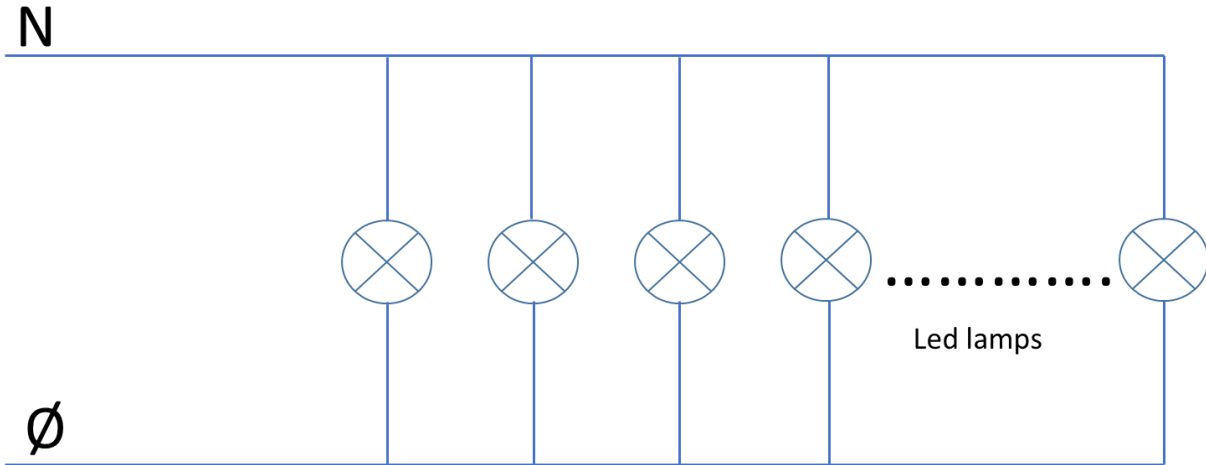

© 2015 Copyright Xlite s.r.l.
Le caratteristiche dei prodotti possono essere soggette a modifiche senza preavviso / Specification and dimensions subject to change without prior notice

Legal note : Xlite s.r.l. is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing Xlite s.r.l. products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such Xlite s.r.l. products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that Xlite s.r.l. products are used within specified operating ranges as set forth in the most recent Xlite s.r.l. products specifications. The products described in this document are subject to the foreign exchange and foreign trade laws. The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Xlite s.r.l. for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of Xlite s.r.l. or others. The information contained herein is subject to change without notice